




Turbo-Coolant Cleaning Plant MZF-T10-3Ph

Suitable for separating particles and tramp oil from all sorts of industrial fluids in the tool and automotive industry

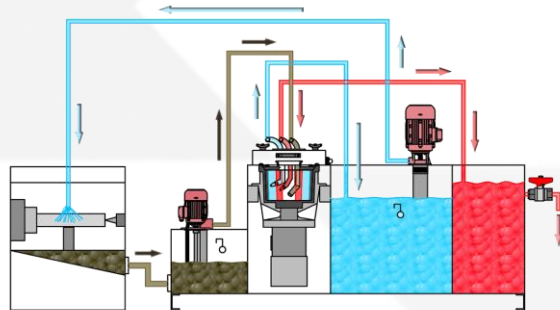

Technical Information	
Flowrate	3 to 6 LPM
Medium	Emulsion or spezial liquid
PH	6.5 until 9.5 / 6.5 until 10.0 / 4.0 until 14.0
Temperature	60° C
Quality of cleanliness	Down to 1 µm possible
Material Housing	Steel or Stainless Steel
Material Rotor	Aluminium / Aluminium anodized / Stainless Steel
Rotor capacity	9 dm3
Sludge Volume	3 bis 5 kg
Type of cleaning	3 phase
Rotor Speed	50 Hz = 2850 RPM 60 Hz = 3400 RPM
Separating Factor	900 g to 1320 g (1 g = gravity acceleration)
Noise emission	< 72 dBa
Drive	Directdrive
Drive Power	2 kW
Solids discharge	Manuell
Liquid return	Under pressure
Controlpanel	Including
Inlet	175 mm
Dimension	> 515 x 710 x 980 mm
Weight	> 270 kg
Options	Inlet Tank (dirty liquid) Clean Liquid Tank Pumps Chiller / Heating System / Aircleaner Magnetic Prefilter



Turbo-Separator
a Turbo-International company

Turbo-Separator AG
Bleikenstrasse 48
9630 Wattwil
Switzerland
+41 71 987 70 20
+41 71 987 20 29
www.turbo-separator.ch
info@turbo-separator.ch