




# Turbo-Centrifuge MZF-T06

Suitable for separating particles from all sorts of industrial fluids.

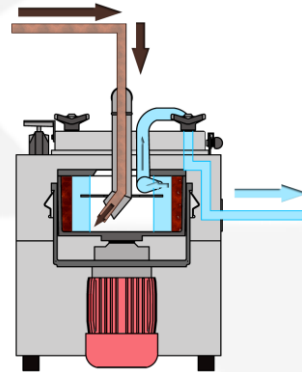

Technical Information	
Flowrate	1 to 20 LPM Oil 1 to 30 LPM Emulsion
Medium	Oil and Emulsion
PH	6.5 until 9.5 / 6.5 until 10.0
Temperature	60° C
Quality of cleanliness	Down to 1 µm
Material Housing	Steel / Stainless Steel
Material Rotor	Aluminium / Aluminium anodized
Rotor capacity	5.2 dm <sup>3</sup>
Sludge Volume	2 to 3 kg
Type of cleaning	2 phase
Rotor Speed	50 Hz = 2850 RPM 60 Hz = 3400 RPM
Separating Factor	900 g to 1180 g (1 g = gravity acceleration)
Noise emission	< 70 dBa
Drive	Directdrive
Drive Power	0.8 kW
Solids discharge	Manuell
Liquid return	In free descent
Controlpanel	Including
Inlet	> 585 mm
Dimension	> 640 x 450 x 585 mm
Weight	> 75 kg
Options	Clean Liquid Tank Pumps Chiller



**Turbo-Separator**  
a Turbo-International company

Turbo-Separator AG  
Bleikenstrasse 48  
9630 Wattwil  
Switzerland  
+41 71 987 70 20  
+41 71 987 20 29  
www.turbo-separator.ch  
info@turbo-separator.ch