




# Turbo-Coolant Cleaning Plant MZF-T22

Suitable for separating particles from all sorts of industrial fluids in the tool and automotive industry

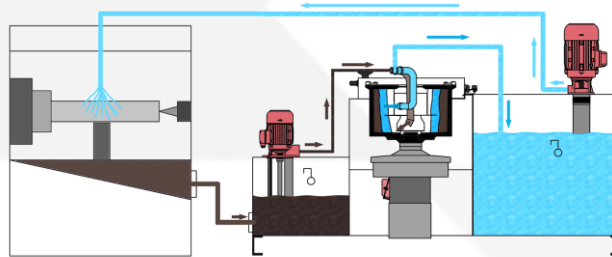

Technical Information	
Flowrate	1 to 120 LPM Oil 1 to 140 LPM Emulsion
Medium	Oil and Emulsion
PH	6.5 until 9.5 / 6.5 until 10.0
Temperature	60° C
Quality of cleanliness	Down to 1 µm possible
Material Housing	Steel or Stainless Steel
Material Rotor	Aluminium / Aluminium anodized
Rotor capacity	22 dm3
Sludge Volume	8 bis 10 kg
Type of cleaning	2 phase
Rotor Speed	3000 RPM
Separating Factor	1930 g (1 g = gravity acceleration)
Noise emission	< 72 dBa
Drive	Directdrive (Frequency controlled)
Drive Power	3 kW
Solids discharge	Manuell
Liquid return	Under pressure
Controlpanel	Including
Inlet	175 mm
Dimension	> 630 x 710 x 980 mm
Weight	> 270 kg
Options	Inlet Tank (dirty liquid) Clean Liquid Tank Pumps Chiller / Heating System / Aircleaner Magnetic Prefilter



**Turbo-Separator**  
a Turbo-International company

Turbo-Separator AG  
Bleikenstrasse 48  
9630 Wattwil  
Switzerland  
+41 71 987 70 20  
+41 71 987 20 29  
www.turbo-separator.ch  
info@turbo-separator.ch