




Turbo-Centrifuge AZF-T40

Automatic discharge

Suitable for separating particles from all sorts of industrial fluids

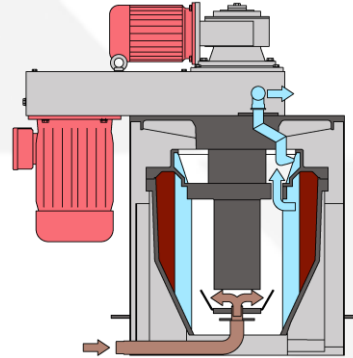

Technical Information	
Flowrate	1 to max. 200 LPM
Medium	Oil and Emulsion
PH	6.5 until 9.5 / 6.5 until 10.0 / 4.0 until 14.0
Temperature	60° C / 90° C
Quality of cleanliness	Down to 1 µm possible
Material Housing	Steel / Stainless Steel
Material Rotor	Aluminium / Aluminium anodized / Stainless Steel
Rotor capacity	40 dm3
Sludge Volume	< 30 kg / hour
Type of cleaning	2 phase or 3 phase
Rotor Speed	2150 RPM to 2400 RPM
Separating Factor	1300 to 1630 g (1 g = gravity acceleration)
Noise emission	< 80 dBa
Drive	Belt Drive (Frequency controlled)
Drive Power	7.5 kW
Solids discharge	Automatically
Liquid return	Under pressure
Controlpanel	Including
Inlet	Need a Feedpump
Dimension	> 1200 x 1200 x 2650 mm
Weight	> 620 kg
Options	Inlet (dirty liquid) Tank Clean liquid Tank Pumps Chiller / Heating System / Aircleaner Magnetic Prefilter



Turbo-Separator
a Turbo-International company

Turbo-Separator AG
Bleikenstrasse 48
9630 Wattwil
Switzerland
+41 71 987 70 20
+41 71 987 20 29
www.turbo-separator.ch
info@turbo-separator.ch