




Turbo-Centrifuge MZF-T06

Suitable for separating particles from all sorts of industrial fluids.

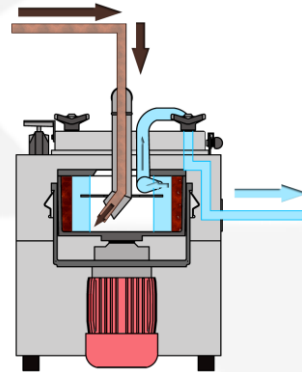

Technical Information	
Flowrate	1 to 20 LPM Oil 1 to 30 LPM Emulsion
Medium	Oil and Emulsion
PH	6.5 until 9.5 / 6.5 until 10.0
Temperature	60° C
Quality of cleanliness	Down to 1 µm
Material Housing	Steel / Stainless Steel
Material Rotor	Aluminium / Aluminium anodized
Rotor capacity	5.2 dm ³
Sludge Volume	2 to 3 kg
Type of cleaning	2 phase
Rotor Speed	50 Hz = 2850 RPM 60 Hz = 3400 RPM
Separating Factor	900 g to 1180 g (1 g = gravity acceleration)
Noise emission	< 70 dBa
Drive	Directdrive
Drive Power	0.7 kW
Solids discharge	Manuell
Liquid return	In free descent
Controlpanel	Including
Inlet	> 585 mm
Dimension	> 640 x 450 x 585 mm
Weight	> 75 kg
Options	Clean Liquid Tank Pumps Chiller



Turbo-Filtration
a Turbo-International company

透波过滤科技（上海）
有限公司
上海市宝山区业绩路21号1栋
电话: 86 21 3616 0508
传真: 86 21 3616 0509
www.turbo-filtration.com.cn
info@turbo-filtration.com.cn